


STANDARD FEATURES:

- High Pressure Jacket for Faster Cooling
- Large lid openings for easy cleanout
- Flapper Discharge or Slide Gate Valve
- Easy to remove Arms and Paddles
- Paddles covering body of Cylinder
- Large discharge openings for faster material removal

AVAILABLE FEATURES & OPTIONS:

- Thick Inner Cylinder for longer Life
- Insulated body for condensation removal
- Jacketed end-plates
- Hydraulic or Air/Oil Cylinders
- End Scrappers
- Sample Ports and Chopper Assemblies

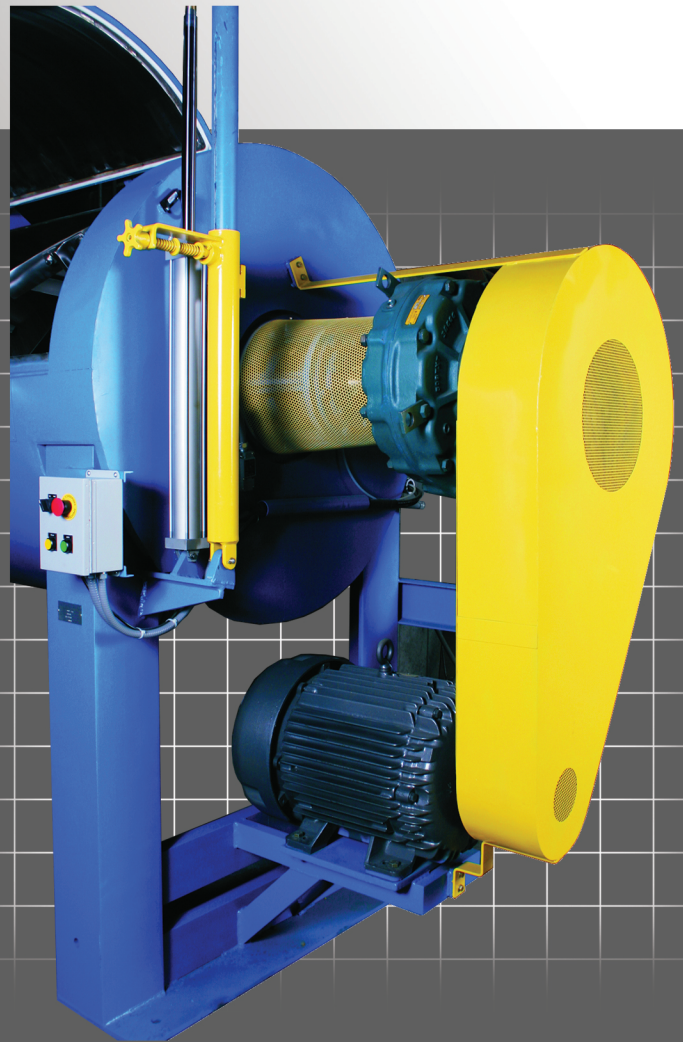

ADDITIONAL FEATURES & OPTIONS:

- Mirror Finish Interior
- Water Bypass System
- Multiple Discharge Openings
- PLC Controls for units used as Mixers
- Plow or Paddled Arms
- Aspiration systems to reduce condensation

Model	Total Capacity		Motor Size **
	Liters	Cu.Ft.	H.P.
HCM-150	154.9	5.5	5.0
HCM-300	311.0	11.0	7.5
HCM-600	601.7	21.2	10.0
HCM-1200	1200.7	42.4	15.0
HCM-1800	1897.6	67.0	30.0
HCM-2400	2543.4	89.8	40.0
HCM-3000	3067.0	108.3	50.0
HCM-4200	4265.4	150.6	60.0
HCM-6000	6177.3	218.1	75.0
HCM-8000	7807.0	275.7	100.0

